LTZ-A

●Small-sized ●High-accuracy ●500 N to 50 kN

High-accuracy Tension Load Cell



Specifications

Performance

Rated Capacity	See table below.
Nonlinearity	Within ±0.03% RO for 500 N to 2 kN
	Within ±0.05% RO for 5 to 50 kN
Hysteresis	Within ±0.03% RO for 500 N to 2 kN
	Within ±0.05% RO for 5 to 50 kN
Repeatability	0.03% RO or less
Rated Output	3 mV/V ±0.2%

Environmental Characteristics

Safe Temperature	-20 to 80°C
Compensated Temperature	-10 to 70°C
Temperature Effect on Zero	Within ±0.005% RO/°C
Temperature Effect on Output	Within ±0.005%/°C

Electrical Characteristics

Safe Excitation	20 V AC or DC					
Recommended Excitation	1 to 10 V AC or DC					
Input Resistance	350 Ω±0.5%					
Output Resistance	350 Ω±0.5%					
Cable 4-conductor (0.5 mm	²) chloroprene shielded cable,					
8.5 mm diameter by 3 m long, with crimp-style terminals for 4 mm						
(Shield wire is not cor	nnected to the case)					

Mechanical Properties


Safe Overloads	150%
Materials	Aluminum alloy (Case of 50KA to 200KA)
Natural Frequencies	See table below.
Weight	See table below.
Degree of Protection	IP64 (IEC 60529)

Optional Accessories (For details, see pages 2-72 to 2-76)

Saddle CA-B Movable saddle ER-B Patch CWM Boll Joints TU-C

Models	Rated Capacity	Natural Frequencies	Weight*
LTZ-50KA	500 N	≈ 1.25 kHz	≈ 300 q
LTZ-100KA	1 kN	≈ 1.75 kHz	≈ 300 g
LTZ-200KA	2 kN	≈ 2 kHz	≈ 350 g
LTZ-500KA	5 kN	≈ 2.5 kHz	≈ 700 q
LTZ-1TA	10 kN	≈ 2.8 kHz	≈ 700 g
LTZ-2TA	LTZ-2TA 20 kN		≈ 1.5 kg
LTZ-5TA	50 kN	≈ 4.3 kHz	≈ 4.4 kg

*Excluding cable



Adopt the Roberval's mechanism to ensure the linearity of within ±0.05%RO

- Compact & lightweight
- Large output
- •Usable also for compressive load measurement (Extra calibration and patches are required.)

Being simple in structure, the LTZ-A is easily handled and maintained. Installing with less burden to existing facilities, they are used as compact, lightweight load cells with excellent cost performance for weighing or testing systems in various fields.



Physical quantity indication

Instrumentation Amplifier WGA-900A

Instrumentation Amplifier











LTZ-A


ombination

2-43







LTZ-50KA to 2TA



LTZ-5TA

Models	А	В	С	φD	E	F	G	φН		
LTZ-50KA	64	32	19	68	32	22	M6, P=1, d=14	1.6		
LTZ-100KA										
LTZ-200KA	74	37	21	70	32	22	M42 D 4 7E - 1 40	2.5		
LTZ-500KA	/4	37	21	78	32	22	M12, P=1.75, d=18	3.5		
LTZ-1TA										
LTZ-2TA	94	47	23	98	40	30	M18, P=1.5, d=25	3.5		
LTZ-5TA		See dimensions above.								

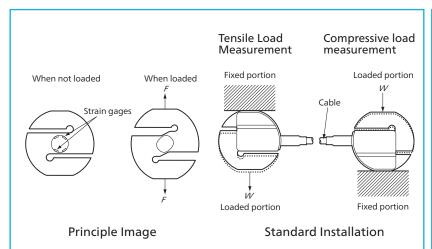




■ Dimensions in Combination with Special Accessories


Contact us for using the tension load cell in combination with special accessories.

In Combination with Patch CWM




① Load Cells	②Patches	В	С	φD	E	R
LTZ-50KA LTZ-100KA	CWM-6	4	M6, P=1	10	68	SR30
LTZ-200KA LTZ-500KA LTZ-1TA	CWM-12	7	M12, P=1.75	19	81	SR30
LTZ-2TA LTZ-5TA	CWM-18 CWM-24	10 17	M18, P=1.5 M24, P=2	26 36	104 137	SR30

●In Combination with Patch CWM, Mount Base CF and Saddle CA



①Load Cells	②Patches	3Mount Bases	φL	φM	φN	
LTZ-50KA	CWM-6 CA-2B		53	38	7	
LTZ-100KA	CVVIVI-0	CA-ZB	33	30	/	
LTZ-200KA						
LTZ-500KA	CWM-12	CA-2B	53	38	7	
LTZ-1TA						
LTZ-2TA	CWM-18	CA-2B	53	38	7	
LTZ-5TA	CWM-24	CA-10B	98	80	11	


●In Combination with Patch CWM, Mount Base CF and Movable Saddle ER



①Load Cells	②Patches	③Movable Saddles	φQ	φR	S
LTZ-50KA LTZ-100KA	CWM-6	ER-2B	108	90	M8
LTZ-200KA LTZ-500KA	CWM-12	CWM-12 ER-2B		90	M8
LTZ-1TA					
LTZ-2TA	CWM-18	ER-2B	108	90	M8
LTZ-5TA	CWM-24	ER-5B	148	128	M12

In Combination with Ball Joint TU

Note: Ball joints (TU) should be mounted to load cells at our factory.

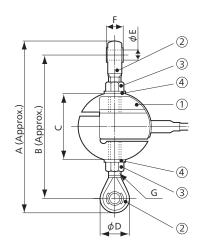

①Load Cells	②Ball Joints	③Hexagon Nuts	4 Spring Washers	А	В	С	φD	φΕ	F	G	Static Breaking Loads (Approx.)
LTZ-50KA	TU-6C	M6, P=1	2# 6S	128	110	64	18	6	9	M6, P=1	1.4 kN
LTZ-100KA	10-60	IVIO, P=1	2# 03	120	110	04	10	6	9	IVIO, P= I	2.9 kN
LTZ-200KA											5.8 kN
LTZ-500KA	TU-12C	M12, P=1.75	2# 12S	196	166	74	30	12	16	M12, P=1.75	14.7 kN
LTZ-1TA											29.4 kN
LTZ-2TA	TU-18C	M18, P=1.5	2# 18S	232	190	94	42	18	23	M18, P=1.5	58.8 kN
LTZ-5TA	TU-24C	M24, P=2	3# 24S	346	276	120	70	25	37	M24, P=2	147 kN

Dimensions A and B are approximate, since the ball joint is screw-in type.